



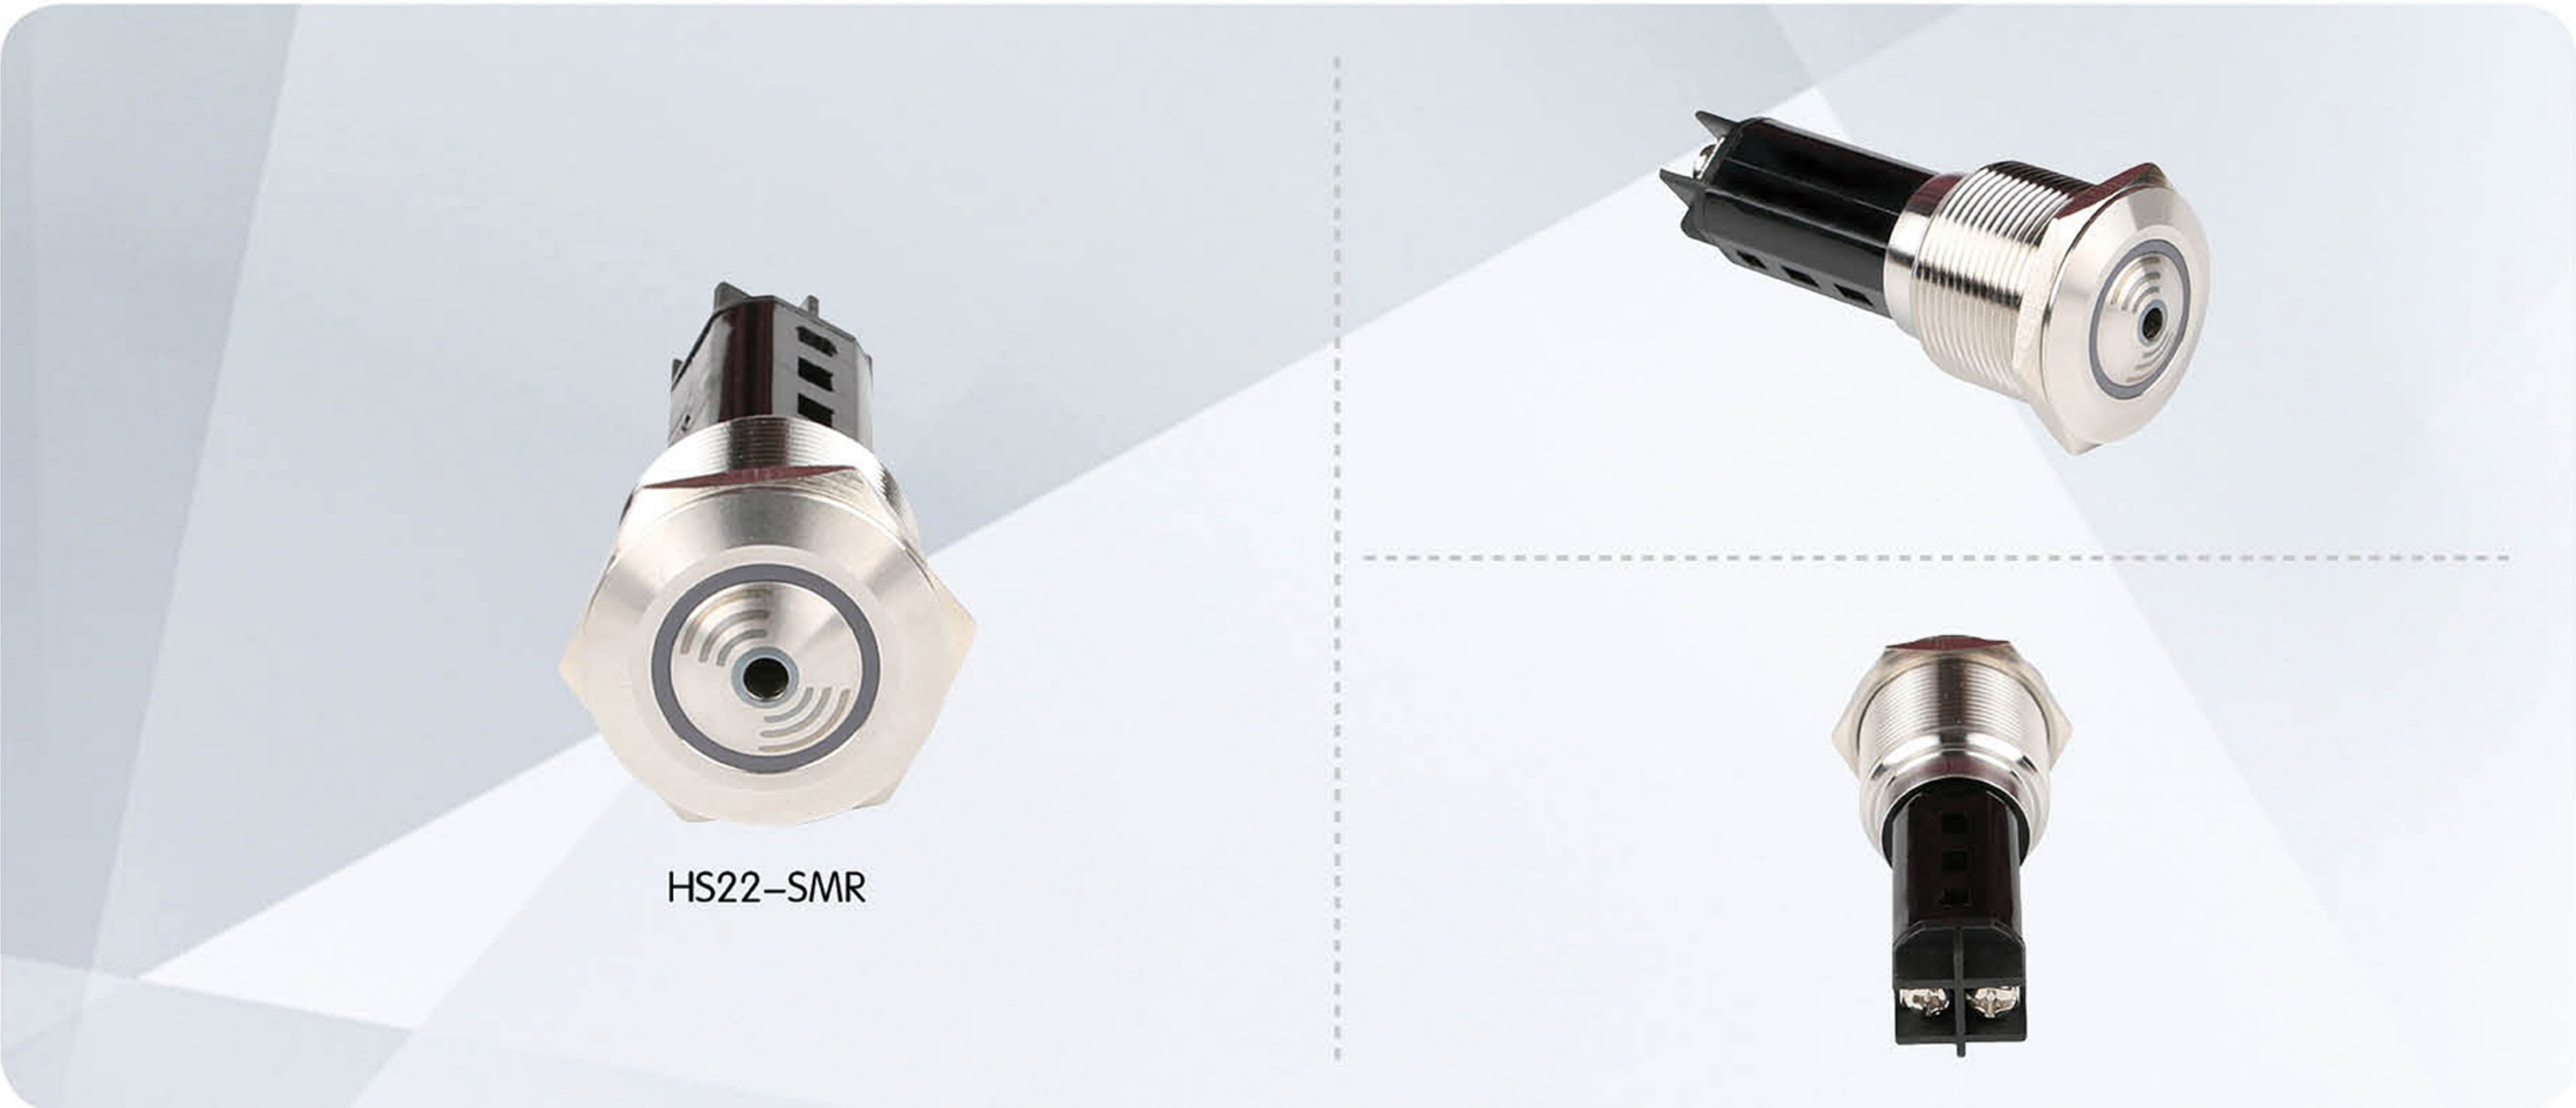

产品参数

安装孔尺寸 Mounting hole size: Φ22mm
声响类型: 连续蜂鸣 (M)/ 间断蜂鸣 (JM)/ 闪光蜂鸣 (SM)
电压等级 Voltage: DC12V/DC24V/AC
额定电流 Rated current: ≤ 30mA
声音强度: ≥ 85db(0.1 米处) / ≥ 75dB(1 米处)
外壳材料 Housing material: 不锈钢 Stainless steel
防护等级 Protection grade: IP40,IK04
面板厚度 Panel thickness: 1~10mm
螺母扭矩 Nut torque: 约 About 1.6Nm
尾部配置 Tail configuration: 接线柱
端面材料: 不锈钢 Stainless steel
开关型式 Switch type: C(单断点快动触头) C Single breakpoint quickly moving contact point
尾部配置 Tail configuration: 接线柱 screw
基座材料 Base material: PBT
RoHS 可定制 Special Product

产品尺寸图 Diameter

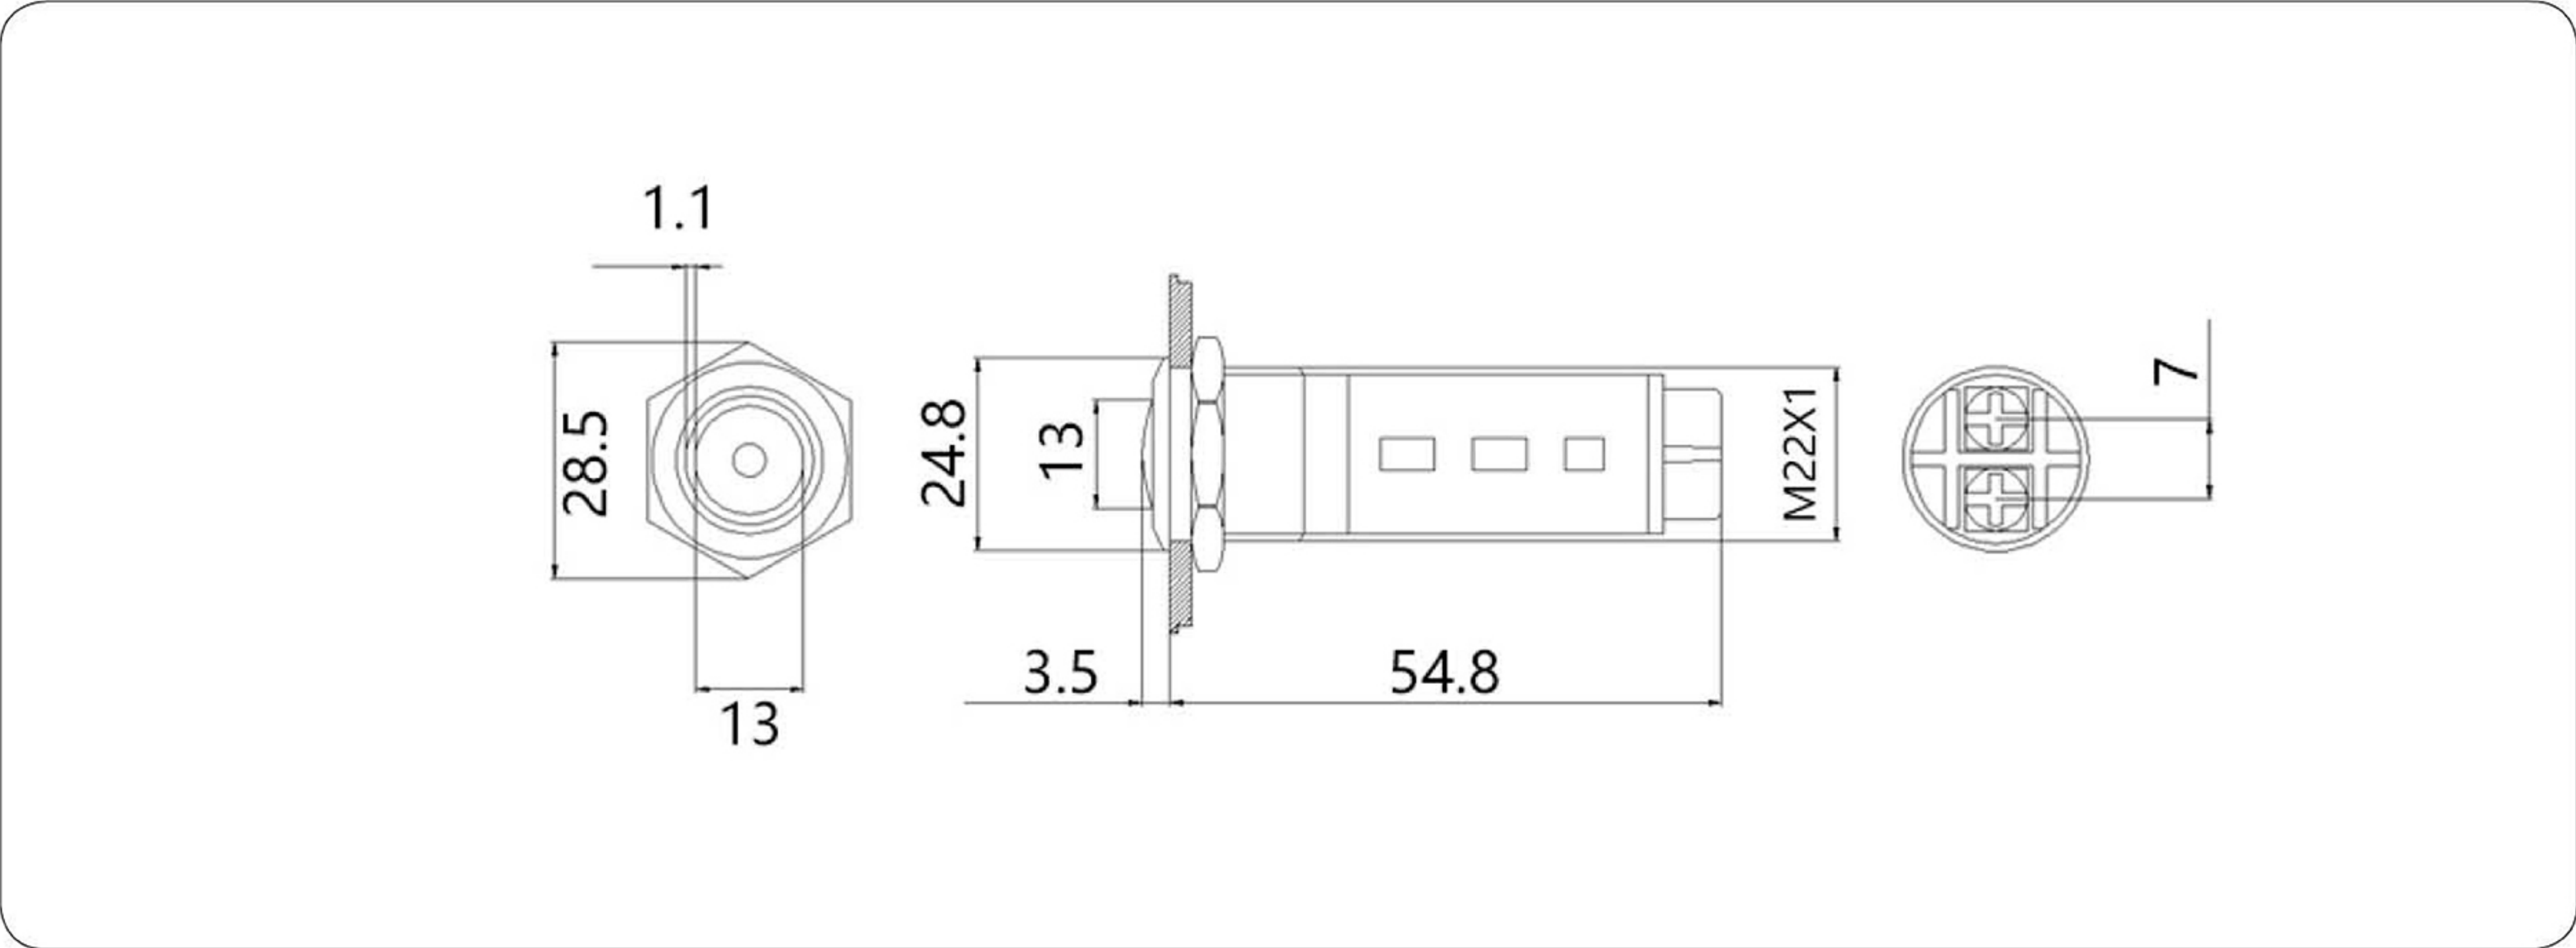

标准及认证 Standard and Certificates

对应标准 Corresponding standard	认证标志 Certification mark	认证机关 / 认证编号 Certification Authority / Certification Number
EN61058-1:2002+A2:2008	CE	VOV/VT11018807
EN60947-1:2004	CE	CTS/CTS070706-01006-E