


Φ16金属按钮开关 Metal push button switch

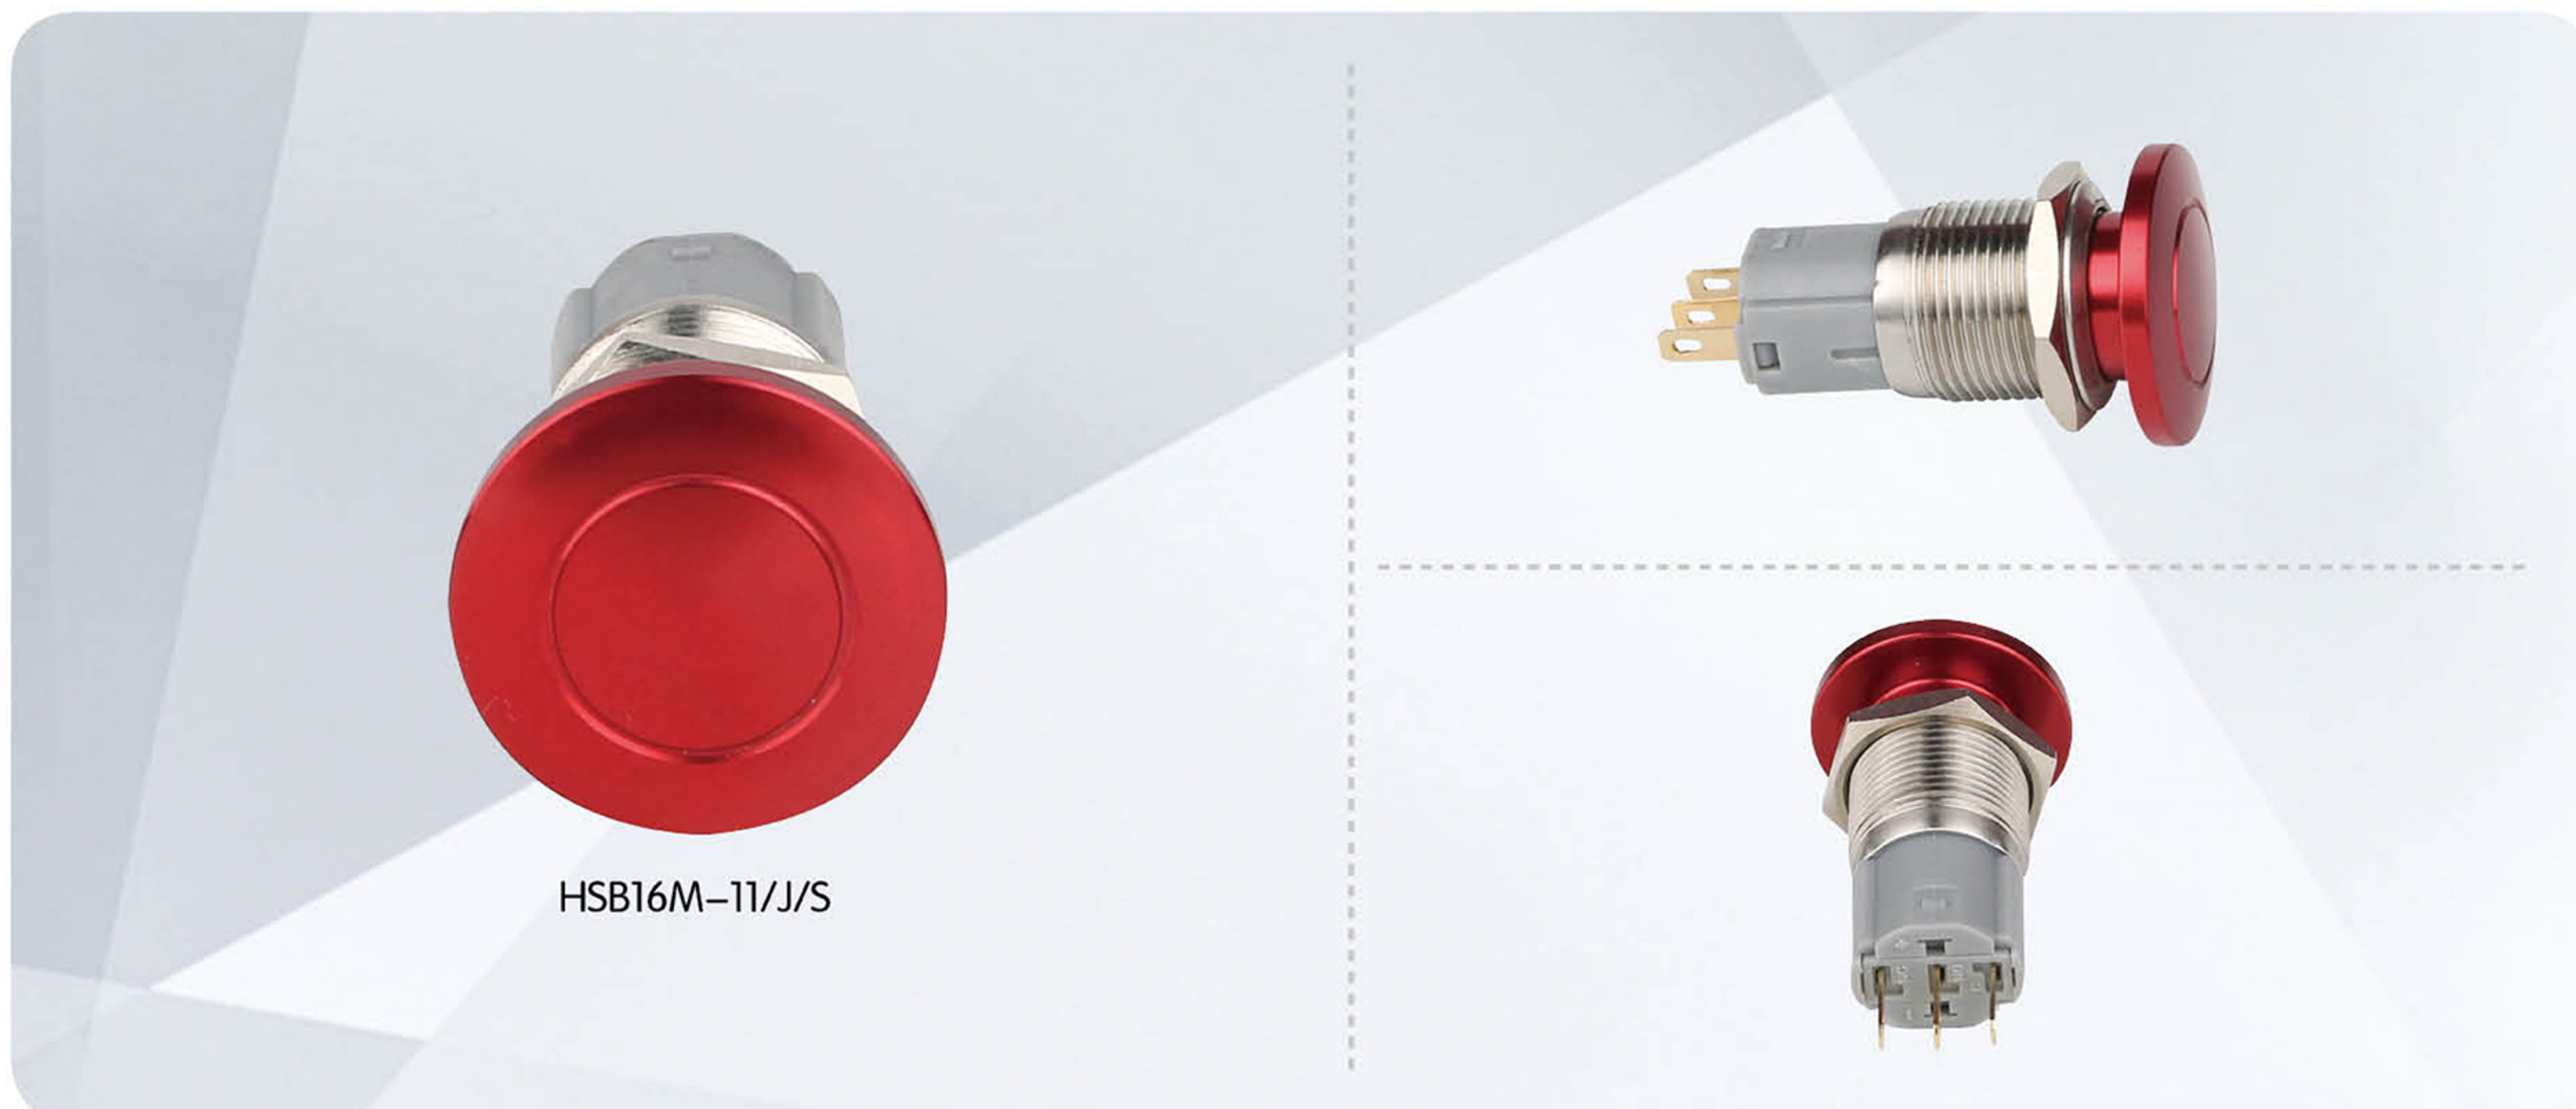

型号说明 Model description

HS16	★	□	■	◇	△ ☆	▲	○
系列号 Serial Number	头部形状 Head shape F 平圆形 F Flat round H 高平圆形 H High round M 蘑菇 M Mushroom	开关组合 Switch combination 1NO+1NC (NO 为常开触点) (NO is normally open contact)	操作类型 Operation type 无 Z 自复式 Without Z Momentary Z 自锁式 Z Latched	发光类型 Luminescence type D 单点 D Single point E 环形 E Annular EP 环形灯 + 电源标 EP Annular+Power P 电源标 P Power ED 环形 + 单点 ED Ring + dot	灯珠颜色 Luminous color R G Y B W O P	带灯电压 (AV/DC,V) Lamp voltage (AV/DC,V) 6 12 24 36 48 110 220	外壳材质 Shell material S 不锈钢 S Stainless steel T 铜镀镍 T Copper plated Ni G 铜镀铬 G Copper plated Cr

性能特征 Performance characteristics

额定绝缘电压 Ui Rated insulation voltage Ui		AC250V				
发热电流 Ith Heating current Ith		3A				
额定电压 Rated voltage		DC12V	DC24V	DC110V	AC220V	
额定使用电流 Rated current	交流 AC 50/60Hz	电阻性负载 Resistive load	—	—	5A	3A
		电感性负载 Inductive load	—	—	3A	2A
	直流 DC	电阻性负载 Resistive load	5A	5A	1A	0.5A
		电感性负载 Inductive load	2A	2A	0.2A	0.1A

安装孔尺寸 Mounting hole size: Φ16mm

开关额定值 Opening rating: 3A/250VAC

开关组合 Switch combination: 1NO/1NC

防护等级 Switch Rating: IP67 IK09

操作类型 Operation type: 自复式 / 自锁式 Self compound/alternate
头部形状 The front shape: 平圆形 / 高平圆形 / 蘑菇 Flat round/
High round/mushroom


外壳材料 The crust material: 锌铝合金 / 黄铜镀镍 / 不锈钢 zinc
aluminum alloy/Nickel plated brass/Stainless steel

防护等级 IP degree: IP67,IK10

开关结构说明 Switch structure description

型式 Type	C
符号 Sign	NO — NC — C
示意图 schematic diagram	NO — NC — C

产品尺寸图 Diameter

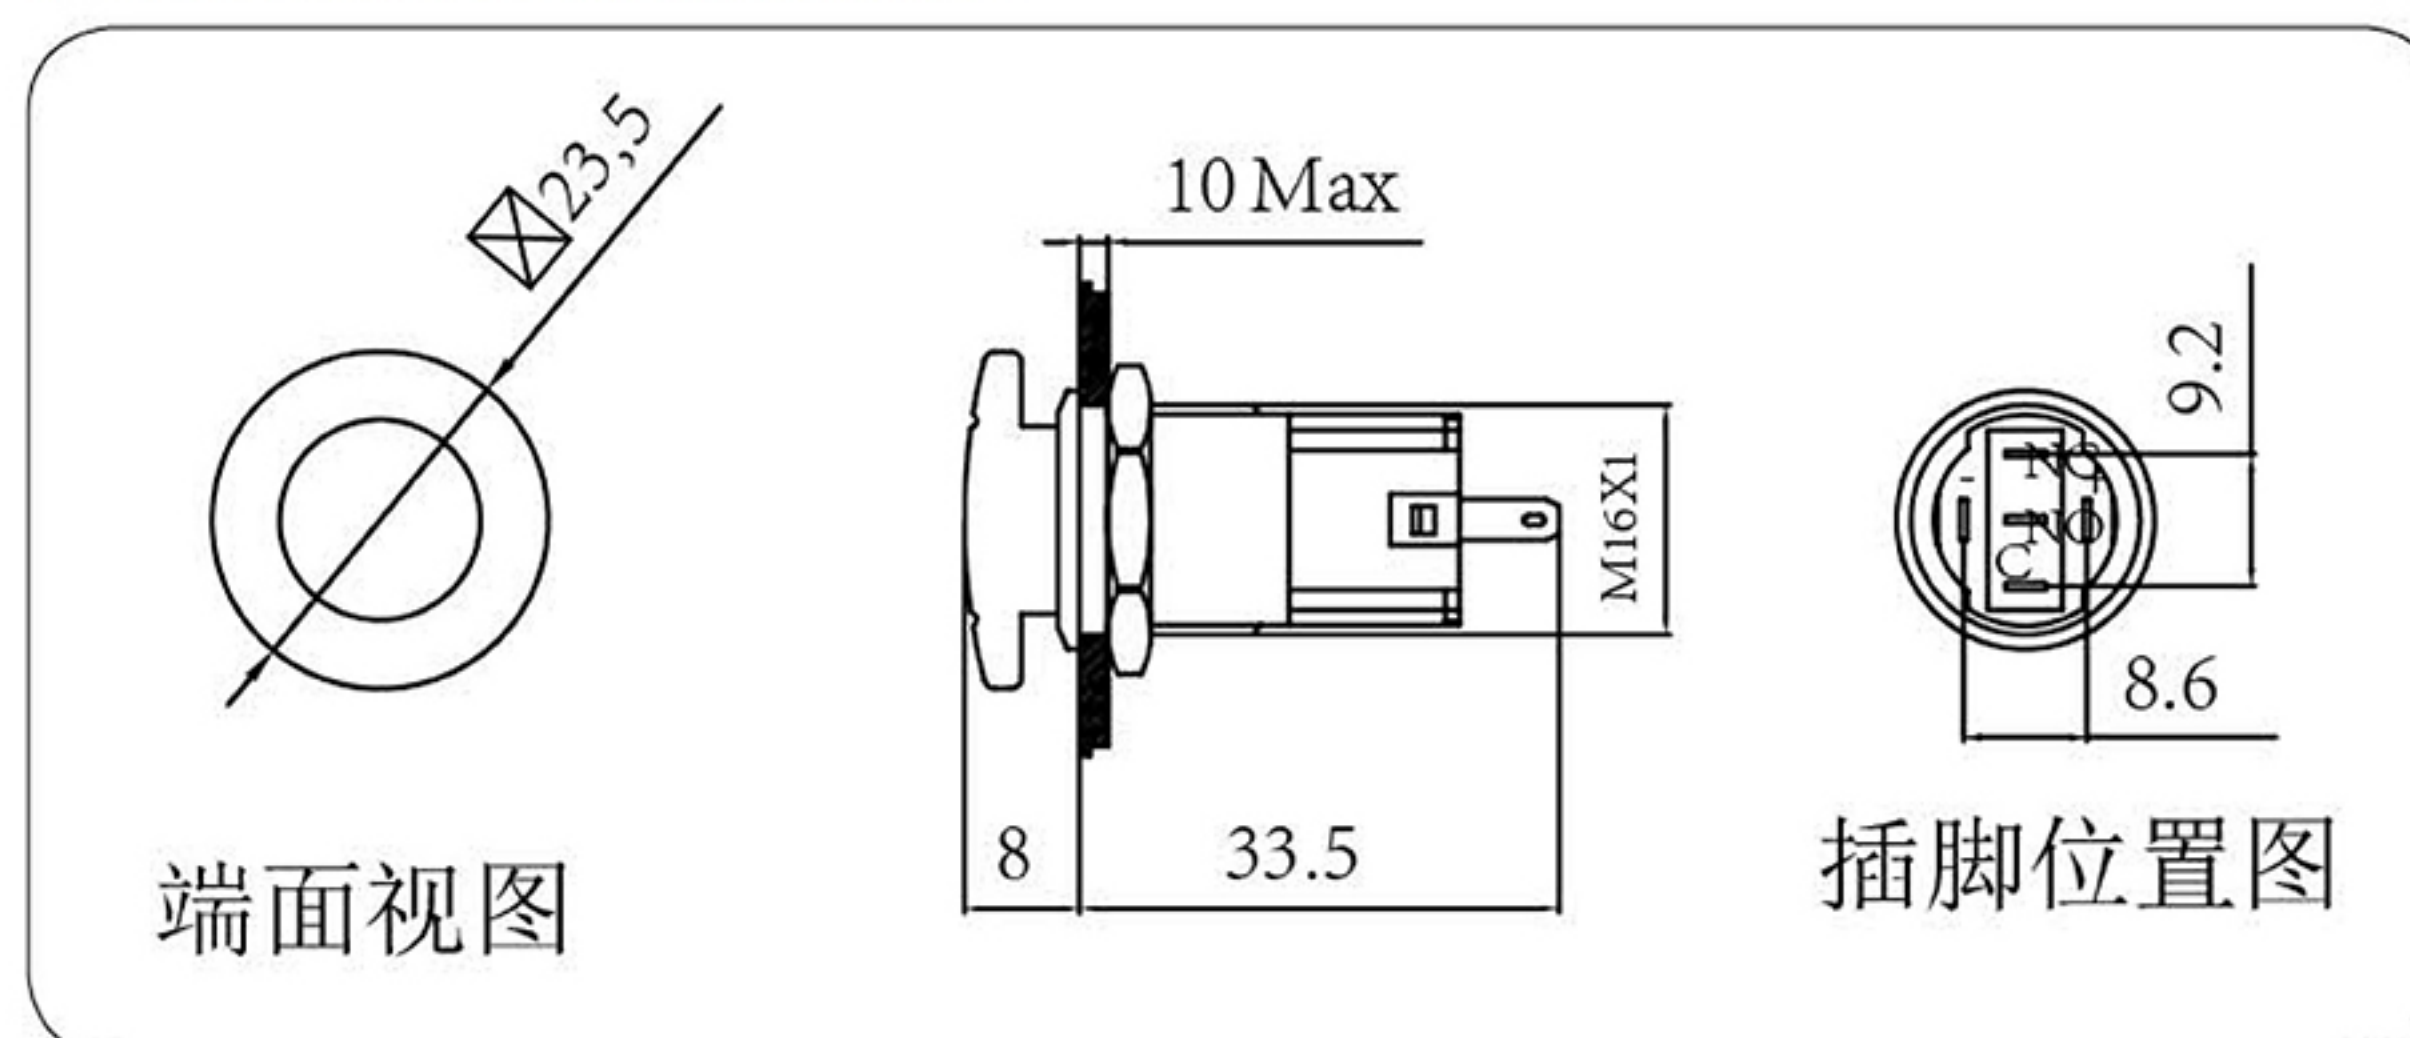

标准及认证 Standard and Certificates

对应标准 Corresponding standard	认证标志 Certification mark	认证机关 / 认证编号 Certification Authority / Certification Number
EN61058-1:2002+A2:2008	CE	VOV/VT11018807
EN60947-1:2004	CE	CTS/CTS070706-01006-E